

Lifejacket For Children

RSEY-1

◆ PRODUCT INTRODUCTION:

The marine lifejacket for children fabric select high-strength polyester oxford, buoyancy material is EPE closed-cell foam. It is equipped with lifejacket light, whistle, buddy line and lifting loop. It can be divided into slipover-style and vest-style according to different designs.

◆ PRODUCT PERFORMANCE PARAMETERS:

There were no signs of damage after ten cycles at -30°C and +65°C ambient temperature, such as shrinkage, cracking, swelling, decomposition or changes in mechanical properties. The strength of the jacket itself and the lifting ring should be $\geq 2400\text{N}$

Shoulder strength $\geq 700\text{N}$

Whistle string strength $\geq 225\text{N}$

Buoyancy: after 24 h buoyancy will loss less than 5%



◆ Model No.: RSEY-1

IMPA Code: 33 01 49

Material Fabric: Polyester Oxford Textile

Inside: EPE foam

Weight: <0.5kg

Buoyancy: $\geq 88\text{N}$

Reflective area: $\geq 400\text{cm}^2$

Rescue line: 1920mm length rescue line

Accessories: Whistle, Buddy line, Lifting loop



Model display

JIAXING RONGSHENG LIFESAVING EQUIPMENT CO.,LTD

ADD: No.159, Yaojia Road, Wangdian Town. Jiaxing City, Zhejiang P.R. China

Tel: 0086-573-83324318 / Web: www.rsjs.com / E-mail: rsjs@rsjs.com

Model	Buoyancy	Reflective area	Weight	Suitable height	Suitable weight	Dimension	Design
RSEY-1	≥88N	≥ 400cm ²	0.5kg	100-155cm	15-43kg	610*320*115mm	Vest-style

PRODUCT TECHNICAL STANDARD:

SOLAS 1974 and Amendments, Chapter III, Articles 4, 7, 22 and 34;
 Chapters I and II of the MSC.48 (66) International Code for Lifesaving Equipment amended by MSC.207 (81), MSC.218 (82) and MSC.368 (93);
 MSC.81 (70) Amended Recommendations for Tests on Life-saving Equipment, Part 1 and Part 2, amended by MSC.200 (80), MSC.226 (82), MSC.323 (89) and MSC.378 (93).


USE OPERATION:

- (1) wear lifejackets in the same way as wearing a vest
- (2) Sort out the life jacket, fasten the waist buckle and tighten it, adjust the underarm contraction band, and fasten the collar buckle.
- (3) Check the position of lifejacket light and whistle.
- (4) Contact and friction with sharp objects should be avoided during use in order to protect the lifejacket from fraying.

VALIDITY: Check the validity of the attachment.

PACKAGE: Standard package, 20pcs/Carton, 0.3m³/Carton

CERTIFICATE: EC/CCS/RS

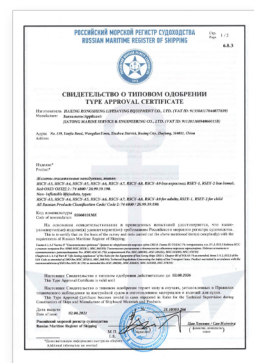

JIAXING RONGSHENG LIFESAVING EQUIPMENT CO.,LTD

ADD: No.159, Yaojia Road, Wangdian Town. Jiaxing City. Zhejiang P.R. China

Tel: 0086-573-83324318 / Web: www.rsjs.com / E-mail: rsjs@rsjs.com